

PA6 Low Warp

MATERIAL PROPERTIES

Density	1.15 g/cm ³	ISO 1183
Moisture absorption, 23°C/ 50% r.h.	3,00%	ISO 62
Water absorption, 23°C/ saturation in water	9.5%	ISO 62
Melt Volume Rate, 275°C/5kg	120 cm ³ /10 min	ISO 1133

Mechanical Properties

(dry)

Tensile modulus (23°C, 1mm/min)	2 900 MPa	ISO 527-1/-2
Tensile strength (23°C, 50mm/min)	50 MPa	ISO 527-1/-2
Elongation at break (23°C, 50mm/min)	1,9%	ISO 527-1/-3
Flexural modulus (23°C, 2mm/min)	2 800 MPa	ISO 178
Flexural strength (23°C, 2mm/min)	112 MPa	ISO 178
Charpy unnotched impact strength, 23°C	139 NB kJ/m ²	ISO 179/1eU
Charpy notched impact strength, 23°C	6,8 kJ/m ²	ISO 179/1eU

Thermal Properties

Melting temperature (DSC), 10°C/min	185°C	ISO 3146
Heat Deflection Temperature (HDT)	60°C	ISO 75-1/-2
Flammability, 1.5mm	V2	UL-94

GUIDELINE FOR PRINT SETTINGS*

Nozzle temperature	250-280°C
Bed temperature	85-100°C
Active cooling fan	0 - 30%
Layer height**	≥ 0.15mm
Shell thickness**	0.40 - 2.70 mm
Print speed**	30-70 mm/s
Closed chamber	recommended
Dry box	recommended
Ruby or hardened nozzle	not necessary
Drying (if wet)	necessary***

* settings are based on a 0,4 mm nozzle.

*** at least 12h at 80 using a hot dry air oven

** depending on the geometrical complexity

Disclaimer

The product- and technical data provided in this datasheet is correct to the best of Spectrum Group Sp. z o.o. knowledge and are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary according to printing conditions, model complexity, environmental conditions, etc. The user assumes all responsibility for the use of all information provided and shall verify quality and other properties or any consequence from the use of all such information. Typical values are indicative only and are not to be construed as being binding specifications. Spectrum Group Sp. z o.o. shall not be made liable for any damage, injury or loss induced from the use of Spectrum Group Sp. z o.o. materials in any particular application.

DESCRIPTION


Spectrum PA6 Low Warp is an extremely durable construction material based on polycaprolactam improved with admixtures to reduce the high shrinkage inherent to the processing of such materials. The most important characteristics of the Spectrum PA6 Low Warp filament are, among others: resistance to fuel and oils, high impact strength and very good mechanical properties.

FEAURES

- low processing shrinkage
- high mechanical strength
- chemical resistance to lubricants and oils
- wide variety of applications
- a very high adhesion between layers, which minimises the risk of delamination

STORAGE AND SHELF LIFE

Filament should be stored in a dry room at room temperature. Recommended storage temperature is ca. 18-25°C (64.4 -77.0°F). Keep out of moisture, sunlight and direct heat. When stored properly, product has a shelf life of 24 months.

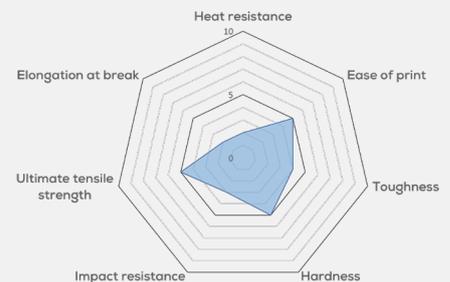

SUPPORT

If you have any questions or experience any issues, please do not hesitate to contact us at support@spectrumfilaments.com